# Hooks

#### Floating pine hooks

	Model	Length	Ø Shaft		Hook	Spare
	WOOG	cm	30 mm 32 mm		colour	hook
^	Floating pine boat hook.	120	16591	-	0	62244
A		180	16592	-	Grey	
	Floating pine boat hook. Plastic en buffer. Anodised light alloy hook.	180	-	10333	White	14733
В		240		10334		
		300	-	10335		
П	Floating pine boat hook. Plastic end buffer. Plastic hook.	180	10337	-		
С		240	10338		Grey	62244
		300	10339	-		

## Fibre glass hooks


Model	Length cm	Ø Shaft 25 mm	Hook colour	Spare hook
Fibre glass boat hook.	120	10111		38579
Combines strength	180	10112	Black	
with lightness. White.	240	10113		

### Light alloy hooks


	Model	Length cm	Ø Shaft 25 mm	Hook colour	Spare hook
	Floating anodised light alloy.	130	62090		
E	Rubber end buffer. Plastic	180	62091	Grey	62095
	hook.	210	62092		


#### **Options & Accessories**

#### · Replacement hooks Ø int. 30 mm Model Colour 25 mm 32 mm 62244 A Female hook fitting, plastic Grey **B** Female hook fitting, plastic 62095 Grey C Female hook fitting, plastic 38579 Black **D** Female hook fitting, anodised aluminium














To be fixed on Ø 18.5 to 25.5 mm pulpit or stanchion. Suitable for any tube with a diameter from 40 to 45 mm. Screws and nuts included.

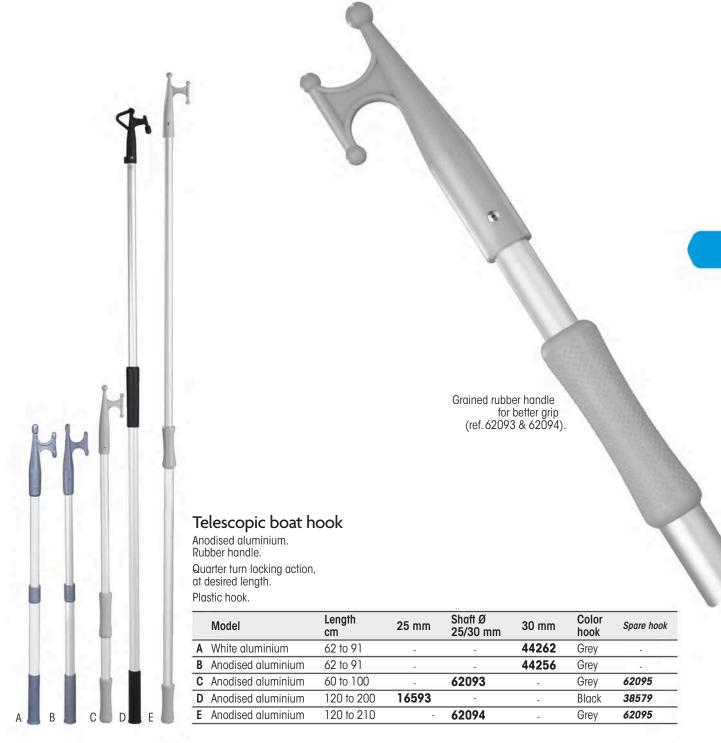



Moor Fast® is a ready-to-use mooring system. It helps threading a rope through a buoy ring or marina cleat up to 2 meters away from the safety of your deck, easily bringing it back on board. The unique Moor Fast® claw even scoop up rings and shackles that lie flat thus uneasy to reach. Manufactured from high-tech materials and built to last in a marine environment, the Moor Fast® design has been carefully researched and tested by boat owners.

The Moor Fast® head has a lifetime guarantee against breakage in normal mooring use. Supplied without pole, it fits any Swobbit® pole (see the Maintenance chapter).