



## 2. Anchoring

Nothing beats a night in a secluded bay, but to enjoy it fully you need to have absolute faith in your ground tackle.

That's why every one of Lewmar's anchors is manufactured to the highest standards and to designs perfected over many decades of research. With a Lewmar anchor on the end of your chain, you can sleep soundly whatever the weather.





## The Lewmar Anchor Range



### Page 41 DTX anchor

Lewmar's new DTX anchor fills the gap between the galvanised and stainless Delta® anchors, allowing boat owners to choose a stainless anchor for a reduced outlay.

The DTX brings the improved aesthetics and anti-corrosion qualities of stainless steel anchors to the mass market.

- Delta® Style Geometry - unique shank profile and ballasted tip for fast, accurate setting
- 316 stainless steel construction
- 3-Year warranty against breakage



### Page 42 Delta® Anchor

The Delta® anchor is constructed of high-grade manganese steel and stainless steel for maximum tensile strength. Its unique shank profile and ballasted tip make it self-launching. And its low center of gravity and self-righting geometry ensure that it will set immediately.

Consistent and reliable in performance, the Delta® anchor is guaranteed for life against breakage\*, has Lloyd's Register General Approval of an Anchor Design\*\* as a High Holding Power anchor and is specified as the primary anchor used by numerous National Lifeboat organizations.



### Page 43 C.Q.R.® Anchor

The C.Q.R.® anchor has gained legendary status for its superior performance. The original drop-forged construction of the C.Q.R.® anchor increases its strength and reliability under load – a genuine C.Q.R.® anchor will not break. Its hinged shank delivers consistent setting and holding even in the very worst conditions. The C.Q.R.® anchor is guaranteed for life against breakage\* and has Lloyd's Register General Approval of an Anchor Design\*\* as a High Holding Power anchor.



### Page 44 Claw Anchor

Design based on anchors used to secure oil rigs in the North Sea. The Claw anchor is constructed of high-grade steel cast in a single piece. It sets effortlessly, holds in a variety of seabeds and stows easily on the bow roller of most boats.



### Page 45 Anchor Accessories

Lewmar supply every anchor accessories you might need from Bow rollers. to devil's claw chain stoppers

\* Damage by deformation or bending is not covered by this guarantee.

\*\* Lloyd's Test Certificate is available for individual Delta® anchors by arrangement.

# DTX Anchor

- 316 stainless steel
- Proven performance
- Lead ballasted tip for fast setting
- 3 year warranty
- Ordinary Holding Power
- Full range from 6kg-63kg



- A** Lewmar branding guarantees quality and authenticity
- B** Useful eye for anchor trip line
- C** Weight concentrated over tip for quick setting
- D** Support bar to help prevent fluke deformation


# DTX

## Selection guide

ANCHOR WEIGHT		BOAT LENGTH OVERALL								
kg	lb	6 m 20 ft	9.2 m 30 ft	12.2 m 40 ft	15.2 m 50 ft	18.3 m 60 ft	21.3 m 70 ft	24.4 m 80 ft	27.4 m 90 ft	
6	14	█								
10	22		█							
16	35			█						
20	44				█					
25	55					█				
32	70						█			
40	88							█		
50	110								█	
63	140									█

Lighter shading represents the upper limit of model. If in doubt, move up a model.  
This information is for guidance only, please consult the relevant Classification Society for specific certification requirements.

## Dimensions Diagram

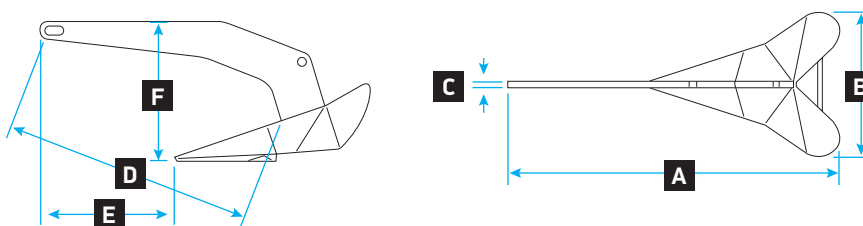

## DTX Anchor Specifications

PART NUMBER	ANCHOR WEIGHT		RECOMMENDED CHAIN SIZE		A		B		C		D		E		F	
	kg	lb	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in
0057206	6	14	6-7	1/4	593	23 3/8	265	10 7/16	10	3/8	450	17 5/8	243	9 1/2	254	10
0057210	10	22	8	5/16	695	27 3/8	310	12 7/32	13	1/2	526	20 5/8	282	11 1/8	292	11 1/2
0057216	16	35	8	5/16	812	32	362	14 1/4	13	1/2	614	24 1/8	328	13	339	13 3/8
0057220	20	44	10	3/8	877	34 1/2	392	15 7/16	16	5/8	663	26 1/8	357	14	368	14 1/2
0057225	25	55	10	3/8	945	37 1/4	415	16 3/8	16	5/8	713	28	387	15 1/4	398	15 5/8
0057232	32	70	10	3/8	1023	40 1/4	453.5	17 7/8	20	3/4	775	30 1/2	425	16 3/4	432	17
0057240	40	88	10	3/8	1103	43 7/16	489	19 1/4	20	3/4	883	32 3/4	437	17 1/4	461	18 1/8
0057250	50	110	12	1/2	1175	46 1/4	523	20 5/8	20	3/4	890	35	479	18 7/8	486	19 1/8
0057263	63	140	12	1/2	1270	50	567	22 5/16	25	1	963	38	508	20	537	21 1/8

Dimensions subject to +/- 2% tolerance



## 2. Anchoring

### Delta® Anchor

The Delta® anchor is constructed of high-grade manganese steel or Duplex stainless steel for maximum tensile strength. Its unique shank profile and ballasted tip make it self-launching. And its low center of gravity and self-righting geometry ensure that it will set immediately.

Consistent and reliable in performance, the Delta® anchor is guaranteed for life against breakage\*, has Lloyd's Register General Approval of an Anchor Design\*\* as a High Holding Power anchor and is specified as the primary anchor used by numerous National Lifeboat organizations.



Galvanized Delta® Anchor




Stainless Steel Delta® Anchor

### Selection guide

ANCHOR WEIGHT		BOAT LENGTH OVERALL								
kg	lb	6 m 20 ft	9.2 m 30 ft	12.2 m 40 ft	15.2 m 50 ft	18.3 m 60 ft	21.3 m 70 ft	24.4 m 80 ft	27.4 m 90 ft	
4	9	█								
6	14		█							
10	22			█						
16	35				█					
20	44					█				
25	55						█			
32	70							█		
40	88								█	
50	110									█
63	140									█

Lighter shading represents the upper limit of model. If in doubt, move up a model. This information is for guidance only, please consult the relevant Classification Society for specific certification requirements.

### Dimensions Diagram

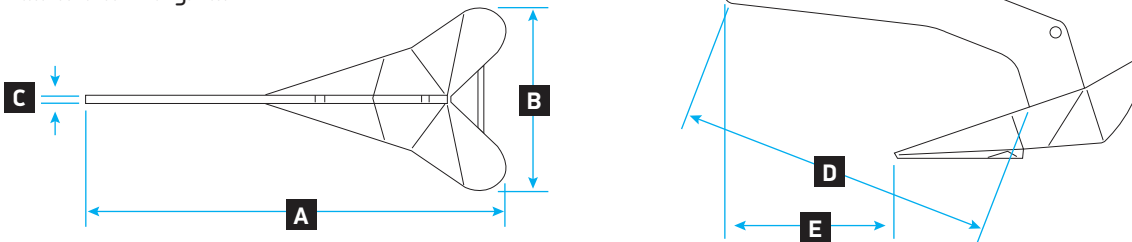

### Delta® Anchor Stainless and Galvanised Specifications

GALVANIZED Part No.	STAINLESS Part No.	ANCHOR WEIGHT		RECOMMENDED CHAIN SIZE		A		B		C		D		E	
		kg	lb	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in
0057404		4	9	6-7	¼	514	20 ¼	228	9	8	5/16	387	15 ¼	210	8 ¼
0057406	0057306	6	14	6-7	¼	595	23 ¾	263	10 ¾	10	¾	450	17 ¾	241	9 ½
0057410	0057310	10	22	8	5/16	695	27 ¾	308	12 ½	12	½	526	20 ¾	283	11 ½
0057416	0057316	16	35	8	5/16	812	32	360	14 ½	12	½	614	24 ½	334	13
0057420	0057320	20	44	10	¾	877	34 ½	389	15 ¼	16	5/8	663	26 ½	361	14 ¼
0057425	0057325	25	55	10	¾	945	37 ¼	417	16 ¾	16	5/8	713	28	384	15 ½
0057432	0057332	32	70	10	¾	1026	40 ¾	455	17 ¾	16	5/8	774	30 ½	417	16 ¾
0057440	0057340	40	88	10	¾	1099	43 ¼	489	19 ¼	20	¾	835	32 ¾	446	17 ½
0057450	0057350	50	110	12	½	1175	46 ¼	520	20 ½	20	¾	890	35	479	18 ¾
0057463	0057363	63	140	12	½	1278	50 ¼	568	22 ¾	22	¾	973	38 ¼	518	20 ¾

Dimensions subject to +/- 2% tolerance

\* Damage by deformation or bending is not covered by this guarantee.

\*\* Lloyd's Test Certificate is available for individual Delta® anchors by arrangement.

## CQR® Anchor

The C.Q.R.® anchor has gained legendary status for its superior performance. The original drop-forged construction of the C.Q.R.® anchor increases its strength and reliability under load – a genuine C.Q.R.® anchor will not break. Its hinged shank delivers consistent setting and holding even in the very worst conditions. The C.Q.R.® anchor is guaranteed for life against breakage\* and has Lloyd’s Register General Approval of an Anchor Design<sup>2</sup> as a High Holding Power anchor.



Galvanized C.Q.R.® Anchor


Stainless Steel C.Q.R.® Anchor

### Selection guide

ANCHOR WEIGHT		BOAT LENGTH OVERALL					
kg	lb	6 m 20 ft	12.2 m 40 ft	18.3 m 60 ft	24.4 m 80 ft	30.5 m 100 ft	
7	15	■					
9	20	■					
11	25		■				
16	35		■				
20	44			■			
27	60			■			
34	75				■		
48	105				■		
66	140					■	
81	180					■	
108	240						■
137	300						
182	400						
227	500						
273	600						

For larger vessel, Lewmar recommend to follow the recommendation given by the relevant Classification Societies, based on the 'Equipment Number' of the vessel

### Dimensions Diagram

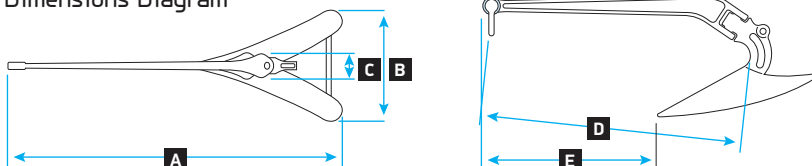

Lighter shading represents the upper limit of model. If in doubt, move up a model. This information is for guidance only, please consult the relevant Classification Society for specific certification requirements.

### C.Q.R.® Anchor Stainless and Galvanised Specifications

GALVANIZED Part No.	STAINLESS Part No.	ANCHOR WEIGHT		RECOMMENDED CHAIN SIZE		A		B		C		D		E	
		kg	lb	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in
0056503		7	15	6	1/4	660	26	235	9 1/4	55	2 1/8	552	21 3/4	330	13
0056504		9	20	8	5/16	775	30 1/2	246	9 5/8	60	2 3/8	647	25 1/2	370	14 1/2
0056505		11	25	8	5/16	825	32 1/2	282	11 1/8	65	2 1/2	677	26 5/8	390	15 3/8
0056506		16	35	8	5/16	981	38 5/8	328	13	76	3	776	30 1/2	513	20 1/8
0056507		20	44	10	3/8	1037	40 5/8	355	14	83	3 1/4	828	32 1/2	528	20 3/4
0056508	0056205	27	60	10	3/8	1117	44	390	15 3/8	89	3 1/2	913	36	555	21 7/8
0056509	0056206	34	75	11	7/16	1190	46 7/8	412	16 1/4	94	3 3/4	978	38 1/2	570	22 1/2
0056510	0056207	48	105	11	7/16	1196	47	485	19	120	4 3/4	843	33 1/8	530	20 7/8
0056511	0056208	66	140	12.5	1/2	1337	52 5/8	537	21 1/8	128	5	933	36 3/4	583	23
0056513	0056209	81	180	12.5	1/2	1450	57	582	23	138	5 1/2	1010	39 3/4	634	25
0056515	0056210	108	240	14	9/16	1560	61 1/2	641	25 1/4	146	5 3/4	1105	43 1/2	694	27 3/8
0056530	0056211	137	300	14	9/16	1682	66 1/4	693	27 1/4	154	6	1194	47	746	29 3/8
0056540		182	400	16	5/8	1865	73 1/2	763	30	164	6 1/2	1319	52	828	32 1/2
0056550		227	500	17.5	11/16	2109	83	825	32 1/2	174	6 7/8	1430	56 1/4	875	34 1/2
0056560		273	600	17.5	11/16	2138	84 1/8	870	34 1/4	184	7 1/4	1511	59 1/2	949	37 3/8

Dimensions subject to +/- 2% tolerance

\* Damage by deformation or bending is not covered by this guarantee.



## 2. Anchoring

### Claw Anchor

Design based on anchors used to secure oil rigs in the North Sea. The Claw anchor is constructed of high-grade steel cast in a single piece. It sets effortlessly, holds in a variety of seabeds and stows easily on the bow roller of most boats. Also ideal for twin installations




#### Selection guide

ANCHOR WEIGHT		BOAT LENGTH OVERALL							
kg	lb	6 m 20 ft	9.2 m 30 ft	12.2 m 40 ft	15.2 m 50 ft	18.3 m 60 ft	21.3 m 70 ft	24.4 m 80 ft	27.4 m 90 ft
1	2.2	■							
2	4.4	■							
5	11		■						
7.5	16.5		■						
10	22		■						
15	33			■					
20	44			■					
30	66				■				
50	110					■			
80	176						■		

Lighter shading represents the upper limit of model. If in doubt, move up a model. This information is for guidance only, please consult the relevant Classification Society for specific certification requirements.

#### Dimensions Diagram

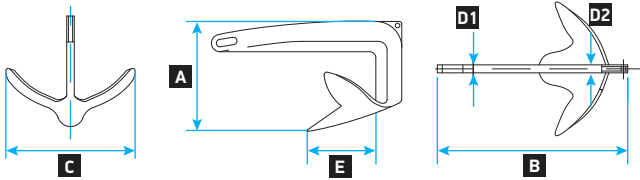

Stainless Steel Claw

Galvanized Claw

#### Claw Anchor Galvanised Specifications

GALVANIZED Part No.	ANCHOR WEIGHT		RECOMMENDED CHAIN SIZE		A		B		C		D1		E	
	kg	lb	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in
0057901	1	2.2	5	3/16	133 ±8	5 1/4	295 ±4	11 5/8	182 ±8	7 3/16	7.5 ±2	5/16	95 ±6	3 3/4
0057902	2	4.4	5	3/16	182 ±8	7 3/16	361 ±4	14 3/16	240 ±8	9 7/16	9 ±2	3/8	123 ±6	4 13/16
0057905	5	11	5	3/16	227 ±10	8 15/16	468 ±5	18 7/16	295 ±8	11 5/8	12 ±3	1/2	150 ±6	5 7/8
0057907	7.5	16.5	6	1/4	263 ±10	10 3/8	499 ±5	19 5/8	324 ±10	12 3/4	15 ±3	9/16	151 ±8	5 15/16
0057910	10	22	8	5/16	282 ±10	11 1/8	540 ±6	21 1/4	360 ±10	14 3/16	15 ±4	9/16	182 ±8	7 3/16
0057915	15	33	8	5/16	342 ±12	13 7/16	630 ±6	24 13/16	435 ±10	17 1/8	16.5 ±4	10/16	206 ±12	8 1/8
0057920	20	44	10	3/8	343 ±12	13 1/2	703 ±8	27 11/16	452 ±12	17 13/16	25 ±5	1	238 ±12	9 3/8
0057930	30	66	10	3/8	397 ±12	15 5/8	812 ±8	31 15/16	515 ±12	20 1/4	24 ±5	5/16	283 ±12	11 1/8
0057950	50	110	12	1/2	465 ±12	18 5/16	943 ±10	37 1/8	625 ±12	24 3/8	25.5 ±5	1	313 ±12	12 5/16
0057980	80	176	12	1/2	528 ±12	20 13/16	1074 ±10	42 3/16	699 ±12	27 1/2	26 ±5	1	365 ±12	14 3/8

#### Claw Anchor Stainless Specifications

STAINLESS STEEL Part No.	ANCHOR WEIGHT		RECOMMENDED CHAIN SIZE		A		B		C		D1		D2		E	
	kg	lb	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in
0058901	1	2.2	5	3/16	135 ±8	5 9/16	292 ±4	11 1/2	195 ±8	7 11/16	8 +	5/16	10 ±2	1/2	106 ±6	4 3/16
0058902	2	4.4	5	3/16	177 ±8	6 15/16	358 ±4	14	240 ±8	9 7/16	7 ±2	1/4	9.5 ±2	3/8	127 ±6	5
0058905	5	11	5	3/16	230 ±10	9 1/16	453 ±5	17 7/8	305 ±8	12	9 ±3	1/4	14.5 ±3	5/8	146 ±6	5 3/4
0058907	7.5	16.5	6	1/4	267 ±10	10 1/2	481 ±5	18 15/16	345 ±10	13 9/16	12.5 ±3	1/2	18 ±3	11/16	138 ±8	5 7/16
0058910	10	22	8	5/16	288 ±10	11 5/16	540 ±6	21 1/4	377 ±10	14 13/16	13 ±4	1/2	19 ±4	3/4	165 ±8	6 1/2
0058915	15	33	8	5/16	332 ±12	13 1/16	625 ±6	24 5/8	448 ±10	17 3/4	15 ±4	9/16	22 ±4	14/16	203 ±12	8
0058920	20	44	10	3/8	357 ±12	14 1/16	661 ±8	26	465 ±12	18 5/16	17 ±5	3/4	25 ±5	1	220 ±12	8 11/16
0058930	30	66	10	3/8	405 ±12	15 15/16	782 ±8	30 3/16	540 ±12	21 1/4	18 ±5	11/16	26 ±5	1	265 ±12	10 7/16
0058950	50	110	12	1/2	454	17 7/8	950	37 3/8	607	23 7/8	25	1	45	1 3/4	325	12 13/16
0058980	80	176	12	1/2	545	21 7/16	1080	42 1/2	740	29 1/8	25	1	45	1 3/4	356	14